

热电模块性能规格书

TEC1-069040-30X30 W150mm


Hot Side Temperature(°C)热面温度(°C)	25 °C	50 °C
Qmax (Watts)最大制冷量(w)	18.1	20.1
Delta Tmax(°C)最大温度差(°C)	67	75
I _{max} (Amps)最大输入电流(A)	3.9	3.9
V _{max} (Volts)最大输入电压(V)	8.4	8.9
ModuleResistance(Ohms)电阻值(Ω)	1.83	2.06

**Tolerances for thermal and electrical parameters ± 10%.
热电参数的公差 ±10%




Performance Curves Th=25 °C



(性能曲线Th=25°C)

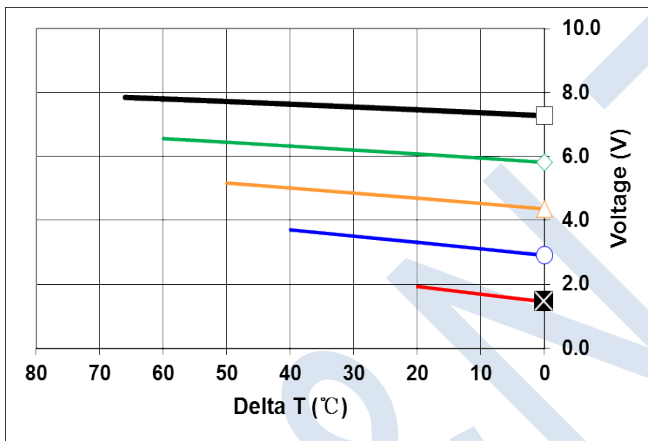

Performance Curves Th=50 °C (性能曲线)

Th=50°C)

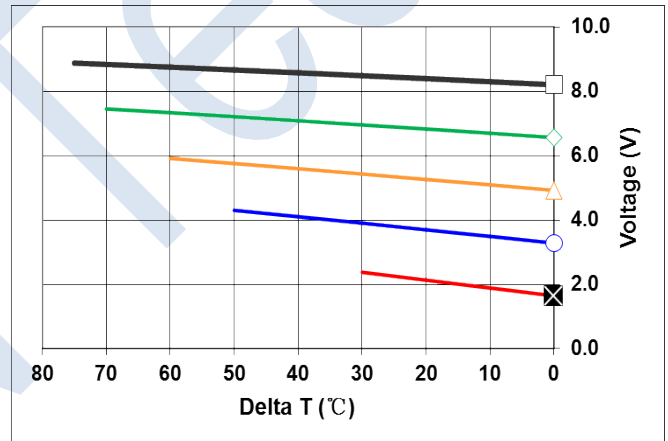

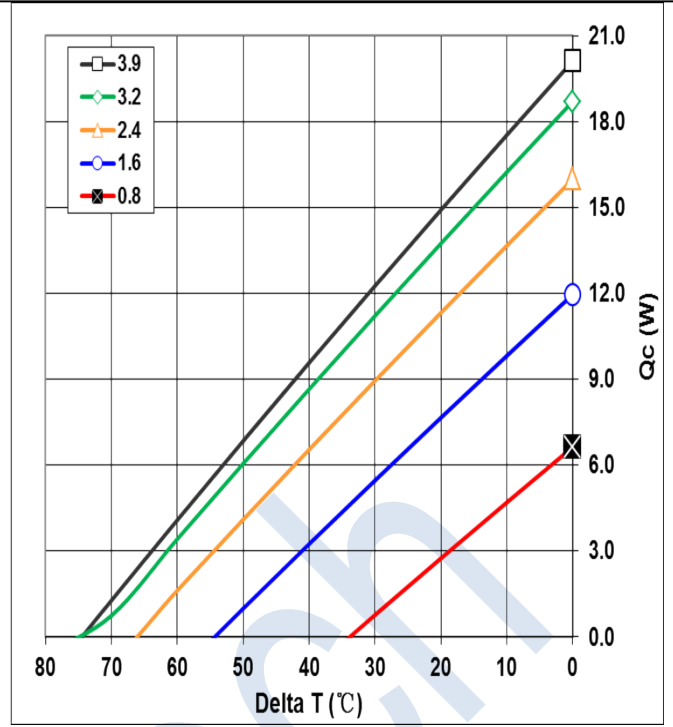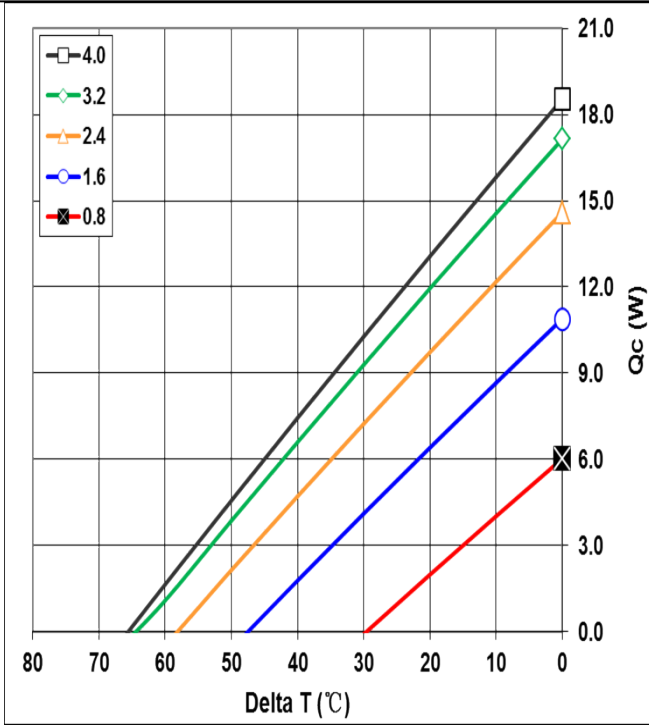

Mechanical Drawing (示意图) :

